

1200W Modified Sine Wave DC - AC Power Inverter

Inverter Expert

CAR Series - CAR1.2KU(with USB)

FEATURES: ■



I/P voltage: 12V DC or 24V DC or 48V DC ◀

Output voltage: 100/110/120V AC or 220/230/240V AC ◀

Output frequency: 50/60Hz ± 3 ◀

I/P protections: Bat.Low alarm; Bat.Low shutdown; Over voltage; Polarity reverse ◀

O/P protections: Over load; Short circuit; Earth fault; Over temperature; Soft start ◀

Output waveform: Modified Sine Wave ◀

Design: High frequency design ◀

Topology: Microprocessor ◀

No load current draw: Low power consumption (standby) ◀

In front panel: With power ON/OFF switch and LED indicator ◀

ON/OFF remote control: optional ◀

Cooling fan: Load controlled or temperature controlled cooling fan (optional) ◀

Output Receptacle (optional)



1.5 YEAR LIMITED WARRANTY



■ SPECIFICATION:

Model		CAR1.2KU-121	CAR1.2KU-122	CAR1.2KU-241	CAR1.2KU-242	CAR1.2KU-481	CAR1.2KU-482
Output	AC Voltage	110V	230V	110V	230V	110V	230V
	AC Voltage Range	100~120V AC	220~240V AC	100~120V AC	220~240V AC	100~120V AC	220~240V AC
	AC Regulation	± 10%					
	Rated Power	1200W					
	Peak Power	2400W(few seconds)					
	Waveform	Modified Sine Wave 					
	Frequency	50/60Hz ± 3					
	USB Port	5V 500mA(optional)					
	LED Indicator	Green for power on, Red for power failure / protection status					
	Cooling fan	Control by load					
Input	DC Current	120A		60A		30A	
	No Load Current Draw	1.05A		0.55A		0.3A	
	DC Voltage	12V		24V		48V	
	Voltage Range	9.5~16V DC		19~32V DC		38~64V DC	
	DC Connector	BVR10 battery clip * 1ea		BVR6 battery clip * 1ea		BVR4 battery clip * 1ea	
Protection	Efficiency	≥ 90%					
	Low Voltage Alarm	11 ± 0.5V DC		22 ± 1V DC		44 ± 1V DC	
	Low Voltage Shutdown	9.5 ± 0.5V DC		19 ± 1V DC		38 ± 1V DC	
	Reset Voltage after L. V. S	11.5V~12V DC		23~24V DC		46~48V DC	
	Overload	Shut off o/p, re-power to recover					
	Over Voltage	15 ± 0.5V DC		30 ± 1V DC		60 ± 2V DC	
	Over Temperature	45 ± 5°C/113 ± 9°F					
	Output Short-circuit	Shut off o/p, when output is short circuit					
	Reverse Polarity	By fuse open					
	Replaceable Fuse	40A*4		20A*4		10A*4	
	Soft Start	Yes, 3~5's					
	Earth Fault	Shut off o/p when the load has electric leakage					
Environment	Working Temp.	0~30℃ @ 100% load; 40℃ @50% load					
	Working Humidity	20%~90% RH non-condensing					
	Storage Temp., Humidity	-30~+70℃/-22~+158°F, 10~95%RH					
	Temp. Coefficient	± 0.05%(0~50℃)					
Safety&EMC	Isolation Resistance	I/P-O/P:100M Ohms/500VDC/25℃/70%RH					
	EMI Conduction&Radiation	Compliance to EN55022 class B, 72/245/CEE, 95/54/CE					
	EMS Immunity	Compliance to EN61000-4-2,3					
	LVD	Compliance to EN60950					
	E-mark	E8 10R-02 0633					
Other	Remote Control	optional(switch with 5m wire)					
	MTBF	100khrs min. MIL - HDBK - 217(25℃)					
	N.W/unit	2400g					
	Dimension(cm)	27.5*20.8*7.7(L*W*H)					
	Packing	Blister card/gift box, 6 units/14.4Kg/Ctn(50*34*44.5cm)					
	Output Receptacle	A, B, C, D, E, F, G, H, I, GFCI(optional)					
	Applications	Home appliance, power tools, office and portable equipment and vehicle...etc.					


Note: Specification prior to change without notice (If without USB, the model is CAR1.2K)

1200W Modified Sine Wave DC - AC Power Inverter

Inverter Expert **CAR Series - CAR1.2KU(with USB)**

MECHANICAL SPECIFICATION:

Unit: mm

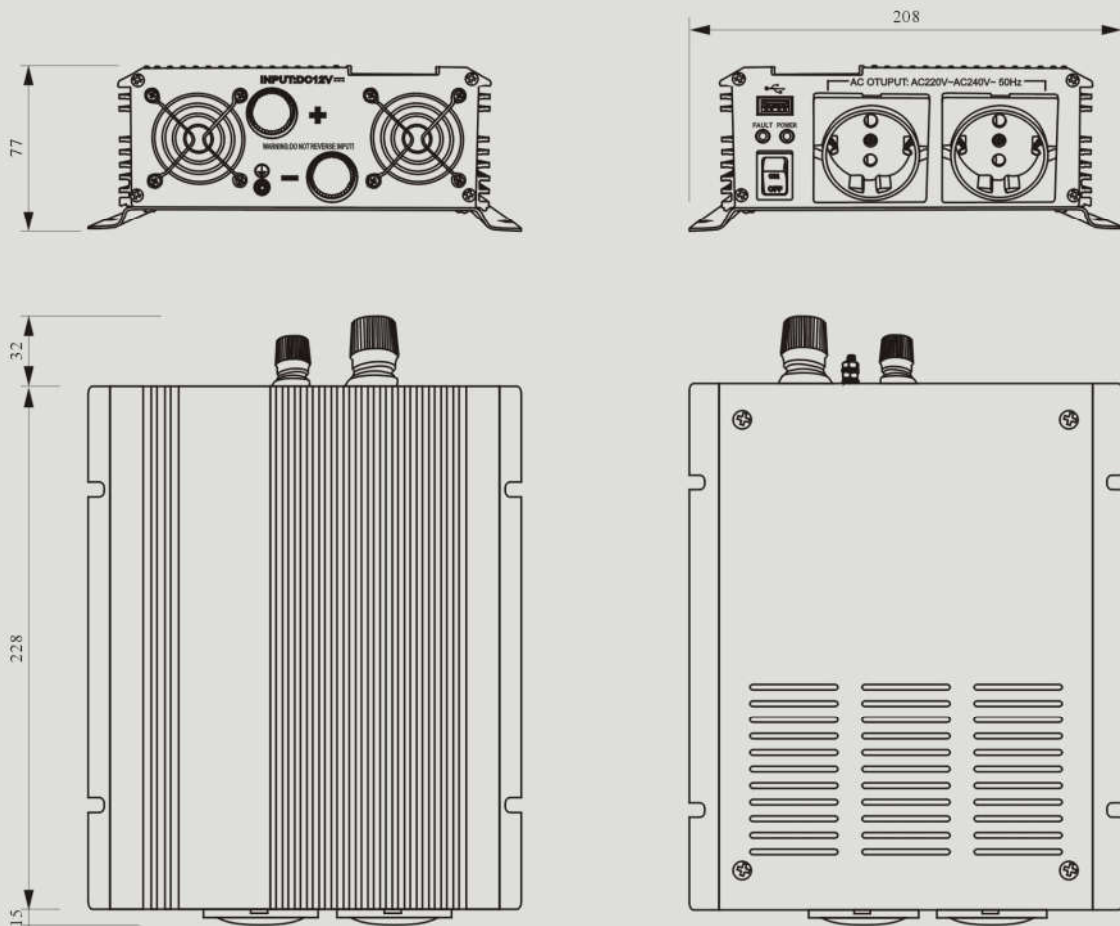

Output Receptacle (optional)

